






Product Type: Compact intermediate relay

Product Name:RET-230AC-1C

Product Description: Compact industrial relay, 1transfer contact 230VAC/ 12A,Test button

Product Size

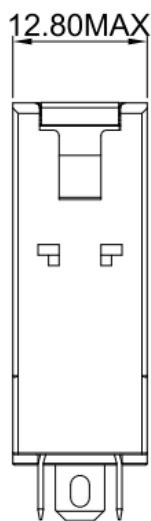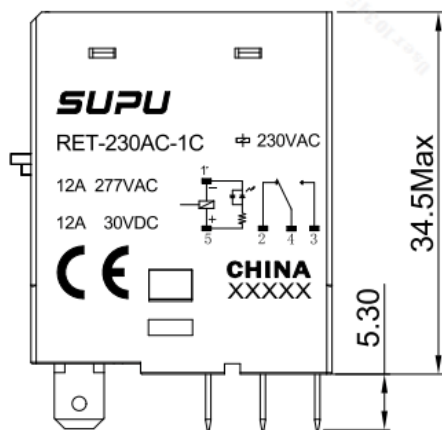

Parameters

⌘ SUPU ID

RET-230AC-1C

⌘ Protection Level

IP40

☞ Ambient temperature (operation)	-25~+55°C
☞ Ambient temperature (storage)	-40~+70°C
☞ Mounting Type	optional
☞ Contact material	silver alloy
☞ Connection method	Push in connection
☞ Contact connection type	1C

Technical data

☞ IEC Rated Voltage	230AC
☞ Overvoltage category	II
☞ Degree of pollution	2
☞ Insulation Resistance	1000MΩ (500VDC)
☞ Dielectric withstand voltage	5000VAC 1min : Coils/ contacts 1000VAC 1min : BetweenContacts 3000VAC 7min : BetweenContacts
☞ Endurance	Mechanical 20 million cycles or more Electrical over 100,000 cycles
☞ Operating voltage	≤75% of rated voltage
☞ Release Voltage	≥10% of rated voltage
☞ Maximum permissible voltage	130% of rated voltage
☞ Nominal power consumption	About1.1~1.4VA
☞ Response time	15ms or less
☞ Release time	20ms or less
☞ Protective circuit	None
☞ Status display	visual
☞ Maximum switching power	3300VA/360W

☞ Rated load capacity	AC277V/12A DC30V/12A
☞ Rated load current	12A

Commercial data	
☞ Order No	RET-230AC-1C
☞ Packing unit	20
☞ Minimum order quantity	20
☞ Single piece weight	19g

Ningbo SUPU Electronics Co., Ltd.
 Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,
 Cixi City, Zhejiang Province, China
 Zip code: 315303
 Switchboard: +86 574-63288158
 Fax: +86 574-63288170
 E-mail:supucontact@supu.cn
 Service Hotline: 400-626-6336



Wechat