






Product Type: IP67 connector

Product Name:ESF-PS150A35B-B

Product Description:

Product Size

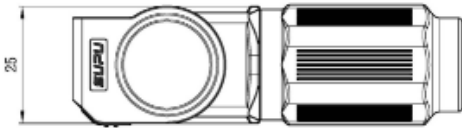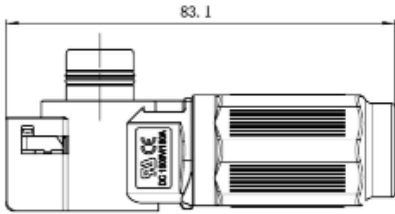

插头除键槽及类型标识不同外，其它结构均相同

| 订货号 | 物料名称 | 插头键槽 | coding | 备注 |
|-----------------|-----------------------|------|--------|----|
| ESF-PS150A35Y | ESF-PS150A35Y 插头 | | 无 | 橙色 |
| ESF-PS150A35B | ESF-PS150A35B 插头 | | | 黑色 |
| ESF-PS150A35Y-A | ESF-PS150A35Y-A 插头 | | A:20° | 橙色 |
| ESF-PS150A35B-A | ESF-PS150A35B-A 插头 | | | 黑色 |
| ESF-PS150A35Y-B | ESF-PS150A35Y-B 插头 | | B:30° | 橙色 |
| ESF-PS150A35B-B | ESF-PS150A35B-B 插头 | | | 黑色 |

Parameters

| | |
|-------------------------|-----------------|
| ☞ SUPU ID | ESF-PS150A35B-B |
| ☞ Number of connections | 1 |
| ☞ Connection method | Crimp |
| ☞ Protection Level | IP67 |

| | |
|-------------------------------|--------------|
| ☞ Operating temperature range | -40°C~125°C |
| ☞ Insulation material | PA |
| ☞ Insulation material group | III |
| ☞ Contact material | Copper alloy |
| ☞ Contact plating | Ag,Plated |
| ☞ Insertion/withdrawal cycles | 100 |
| ☞ Insertion force | ≤75N |
| ☞ Withdrawal force | ≥10N |

Technical data

| | |
|----------------------------|--------------------------|
| ☞ IEC Rated Current | 150A |
| ☞ IEC Rated Voltage | 1500V |
| ☞ Overvoltage category | III |
| ☞ Degree of pollution | 3 |
| ☞ Rated impulse voltage | 12.3KV |
| ☞ UL Rated Current | 35mm ² (AWG2) |
| ☞ UL Rated Voltage | Negative |
| ☞ Stripping length | 20mm±1mm |
| ☞ Rated cross section | 35mm ² (AWG2) |
| ☞ Rated cross section(AWG) | 35mm ² (AWG2) |
| ☞ External cable diameter | 9.5mm~12mm |

Commercial data

| | |
|------------|-----------------|
| ☞ Order No | ESF-PS150A35B-B |
|------------|-----------------|

| | |
|---------------------------------------|---------|
| ☞ Packing unit | 1 |
| ☞ Minimum order quantity | PCS |
| ☞ Weight per unit (without packaging) | 0.062KG |
| ☞ Single piece weight | 0.060KG |

Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,
Cixi City, Zhejiang Province, China

Zip code: 315303

Switchboard: +86 574-63288158

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Service Hotline: 400-626-6336



Wechat