




Product Type: IP67 connector


Product Name:ESF-  
RS200A50BB2-BS

Product Description:

Product Size

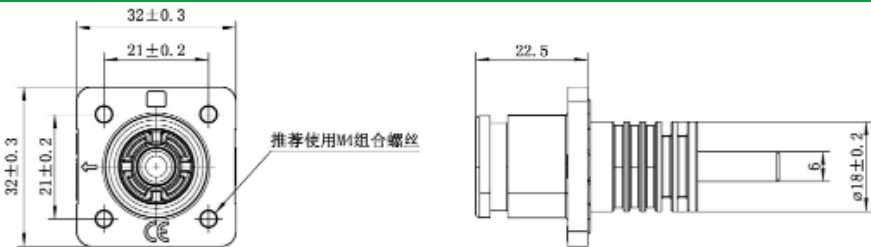

插座除键槽及类型标识不同外，其它结构均相同



| 订货号                | 物料名称                  | 插座键槽 |  | coding          | 备注 |
|--------------------|-----------------------|------|--|-----------------|----|
| ESF-RS200A50YB2    | ESF-RS200A50YB2 插座    |      |  | 无               | 橙色 |
| ESF-RS200A50BB2    | ESF-RS200A50BB2 插座    |      |  |                 | 黑色 |
| ESF-RS200A50YB2-AQ | ESF-RS200A50YB2-AQ 插座 |      |  | A:20°<br>Q:90°  | 橙色 |
| ESF-RS200A50BB2-AQ | ESF-RS200A50BB2-AQ 插座 |      |  |                 | 黑色 |
| ESF-RS200A50YB2-BS | ESF-RS200A50YB2-BS 插座 |      |  | B:30°<br>S:180° | 橙色 |
| ESF-RS200A50BB2-BS | ESF-RS200A50BB2-BS 插座 |      |  |                 | 黑色 |

Parameters

|                       |                    |
|-----------------------|--------------------|
| SUPU ID               | ESF-RS200A50BB2-BS |
| Number of connections | 1                  |
| Connection method     | Screw thread       |
| Protection Level      | IP67               |

|                               |              |
|-------------------------------|--------------|
| ⌘ Operating temperature range | -40℃～125℃    |
| ⌘ Insulation material         | PA           |
| ⌘ Insulation material group   | III          |
| ⌘ Contact material            | Copper alloy |
| ⌘ Contact plating             | Ag,Plated    |
| ⌘ Insertion/withdrawal cycles | 100          |
| ⌘ Insertion force             | ≤75N         |
| ⌘ Withdrawal force            | ≥10N         |

## Technical data

|                            |                                                     |
|----------------------------|-----------------------------------------------------|
| ⌘ IEC Rated Current        | 200A                                                |
| ⌘ IEC Rated Voltage        | 1500V                                               |
| ⌘ Overvoltage category     | III                                                 |
| ⌘ Degree of pollution      | 3                                                   |
| ⌘ Rated impulse voltage    | 12.3KV                                              |
| ⌘ UL Rated Current         | 50mm <sup>2</sup> (AWG1/0)                          |
| ⌘ UL Rated Voltage         | Negative                                            |
| ⌘ Stripping length         | /                                                   |
| ⌘ Rated cross section      | 50mm <sup>2</sup> (AWG1/0)                          |
| ⌘ Rated cross section(AWG) | 50mm <sup>2</sup> (AWG1/0) 35mm <sup>2</sup> (AWG2) |
| ⌘ External cable diameter  | /                                                   |

## Commercial data

|            |                    |
|------------|--------------------|
| ⌘ Order No | ESF-RS200A50BB2-BS |
|------------|--------------------|

|                                       |         |
|---------------------------------------|---------|
| ☞ Packing unit                        | 1       |
| ☞ Minimum order quantity              | PCS     |
| ☞ Weight per unit (without packaging) | 0.047KG |
| ☞ Single piece weight                 | 0.045KG |

## Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,  
Cixi City, Zhejiang Province, China

Zip code: 315303

Switchboard: +86 574-63288158

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Service Hotline: 400-626-6336



Wechat