




Product Type: Transformer terminal

Product Name:620172

Product Description: Pitch:13mm Rated

Voltage : 600V Rated Current:32A Connection method : Screw connection colour : orange

### Product Size

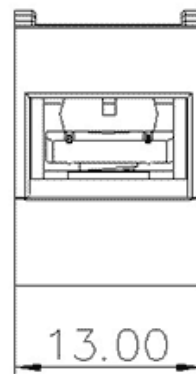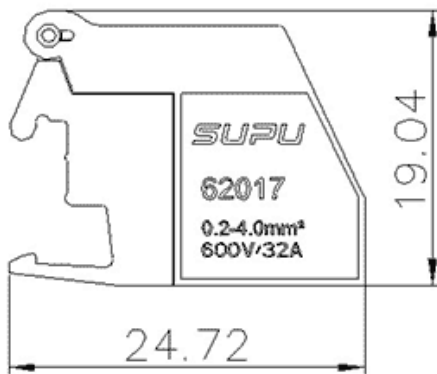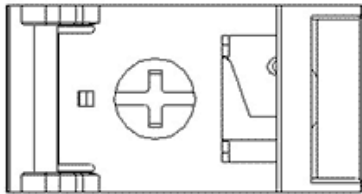

### Parameters

<input checked="" type="checkbox"/> SUPU ID	620112
<input checked="" type="checkbox"/> Pitch	13
<input checked="" type="checkbox"/> Number of levels	single layer
<input checked="" type="checkbox"/> Number of connections	1

<input checked="" type="checkbox"/> Connection method	Screw connection
<input checked="" type="checkbox"/> Protection Level	IP20
<input checked="" type="checkbox"/> Operating temperature range	-25°C~70°C
<input checked="" type="checkbox"/> Insulation material	PA66
<input checked="" type="checkbox"/> Insulation material group	I
<input checked="" type="checkbox"/> Contact material	Copper alloy
<input checked="" type="checkbox"/> Contact plating	Tin
<input checked="" type="checkbox"/> Color	Orange

## Technical data

<input checked="" type="checkbox"/> IEC Rated Current	32A
<input checked="" type="checkbox"/> IEC Rated Voltage	600V
<input checked="" type="checkbox"/> Overvoltage category	III/III/ II
<input checked="" type="checkbox"/> Degree of pollution	3 2 2
<input checked="" type="checkbox"/> Rated impulse voltage	3KV - -
<input checked="" type="checkbox"/> UL Rated Current	20A 20A -
<input checked="" type="checkbox"/> UL Rated Voltage	600V 600V -
<input checked="" type="checkbox"/> Conductor cross section rigid	0.5-4mm <sup>2</sup>
<input checked="" type="checkbox"/> Conductor cross section flexible	0.5-4mm <sup>2</sup>
<input checked="" type="checkbox"/> Conductor cross section flexible,with ferrule	0.5-4mm <sup>2</sup>
<input checked="" type="checkbox"/> Locking screw Specification	M4
<input checked="" type="checkbox"/> Locking screw torque	0.6-0.8N.m
<input checked="" type="checkbox"/> Fixed Screw Specification	-
<input checked="" type="checkbox"/> Stripping length	8~9mm

☒ Order No

620112

## Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,  
Cixi City, Zhejiang Province, China

Zip code: 315303

Switchboard: +86 574-63288158

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Service Hotline: 400-626-6336



Wechat