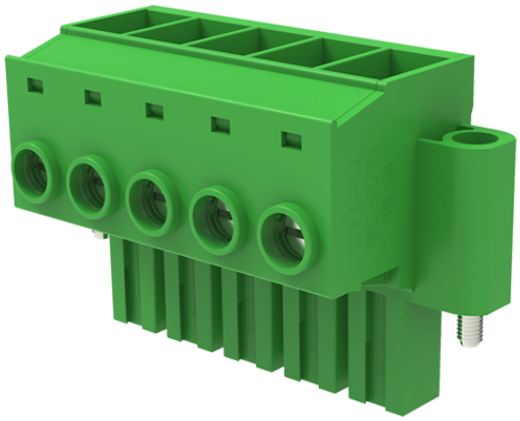

Product Type: Plug-in terminal-Plug

Product Name:MC-RHH10.16HXXC-K-0001

Product Description: Pitch:10.16mm Rated Voltage：1000V Rated Current:76A Connection method：Screw connection colour：customizable

Product Size

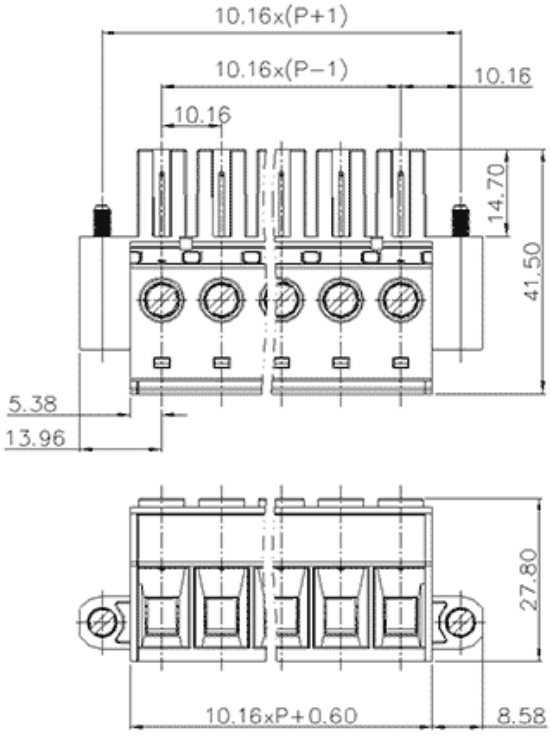

Parameters

SUPU ID	MC-RHH10.16HXXC-K-0001
Pitch	10.16
Number of connections	XX
Connection method	Screw connection

Protection Level	IP20
Operating temperature range	-40~+105°C
Insulation material	PA66
Insulation material group	I
Contact material	Copper alloy
Contact plating	Sn,Plated
Color	Green/Black/Blue/Grey/Orange/Red

Technical data

IEC Rated Current	76A
IEC Rated Voltage	1000V
Overvoltage category	III/III/ II
Degree of pollution	3 2 2
Rated impulse voltage	8.0KV 8.0KV8.0KV
UL Rated Current	55A 55A -
UL Rated Voltage	600V 600V -
Conductor cross section rigid	0.5-16mm²
Conductor cross section flexible	0.5-16mm²
Conductor cross section flexible,with furrule	0.5-16mm²
Locking screw Specification	M4
Locking screw torque	1.2N.m
Fixed Screw Specification	M3
Stripping length	12mm
Use group	B/C/D

Commercial data

Order No	MC-RHH10.16HXXC-K-0001

Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,
Cixi City, Zhejiang Province, China

Zip code: 315303

Switchboard: +86 574-63288158

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Service Hotline: 400-626-6336

Wechat

Date:2026-04-28 08:18

The right to modify data belongs to SUPU.